

High Chemical  
Resistance

High Corrosion  
Resistance



Sealing Surface



**PATENT  
PENDING**

## GENERAL DESCRIPTION

- Material : Reinforced Polyamide
- Operating pressure: 16bar.
- Storage temperature range -30°C / +100°C
- Working temperature range is +1°C / +85°C It instantly reaches +120°C
- Designed according to WRAS certification
- Designed according to KTW certification



Quality is never coincidence.

*İlhami TÖTEK*

**PARTS NO**



**PARTS NAME**

0003.7001.000

TT FV1901



**DIMENSIONS**

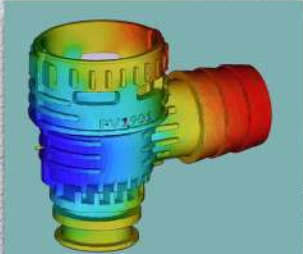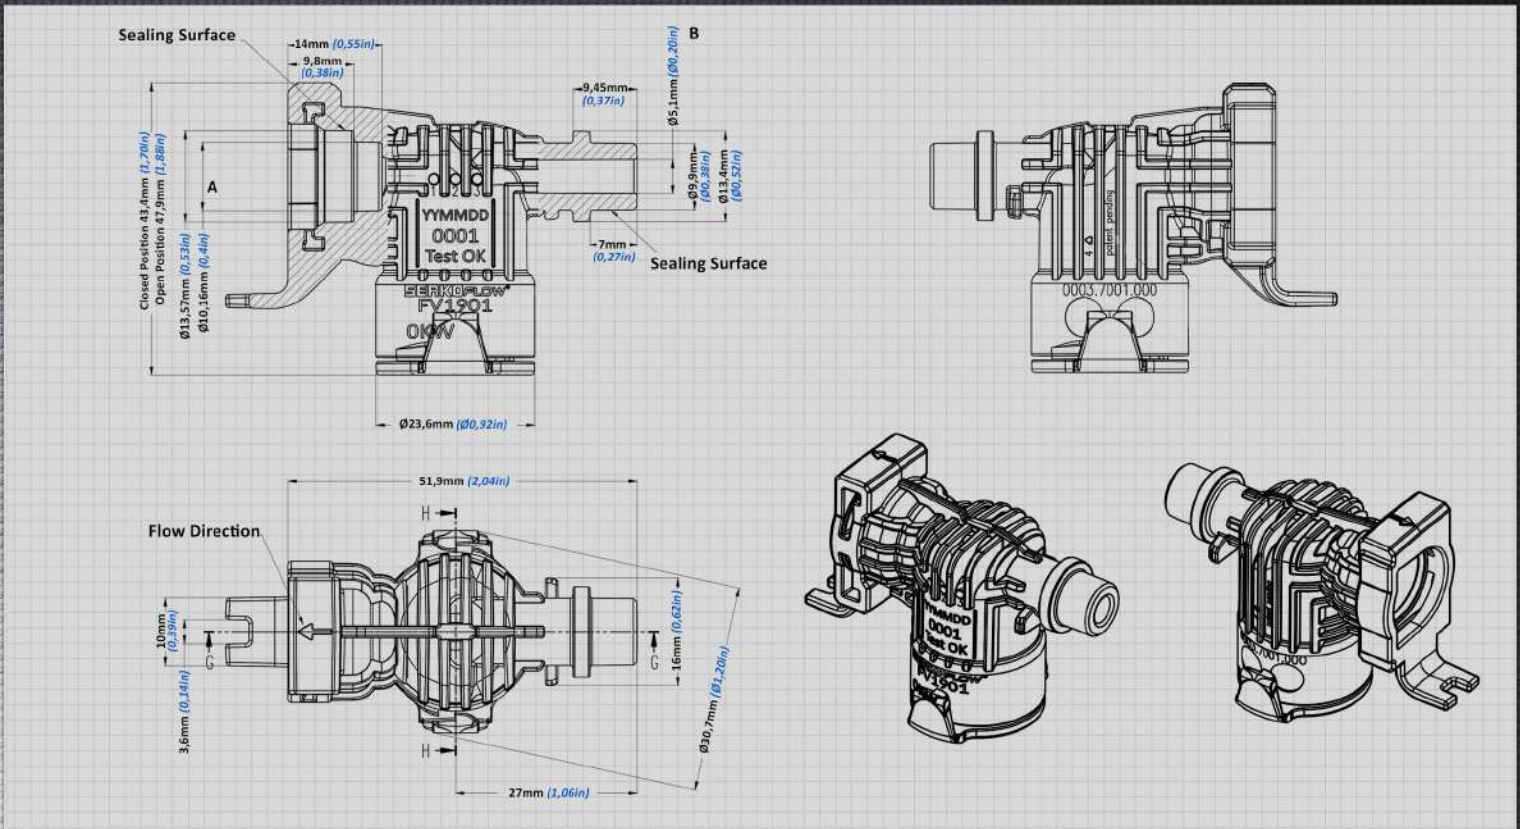

**SERKOFLOW®**

