

SERKOFLOW[®] TT-DC1901 DISCONNECTOR

Sealing Surface

High Chemical Resistance

High Corrosion Resistance



PATENT PENDING

GENERAL DESCRIPTION

- Material : Reinforced Polyamide
- Working pressure: Domestic= max.10bar. Ch=Max. 3bar.
- Burst pressure : Domestic=min.17bar. Ch= min. 4,5bar.
- Storage temperature range -30°C / +100°C
- Operating water temperature range is +1°C / +65°C It instantly reaches +95°C
- Designed according to WRAS certification
- Designed according to KTW certification
- Designed according to ACS certification
- Designed accordance with "EN1717 CAB" type approval



Quality is never coincidence.

İlhami TÖTEK

PARTS NO



PARTS NAME

0003.7006.000

TT DC1901 DISCONNECTOR



DIMENSIONS

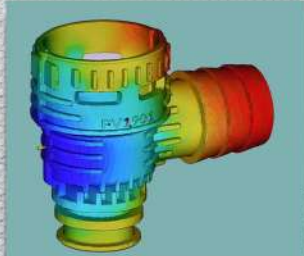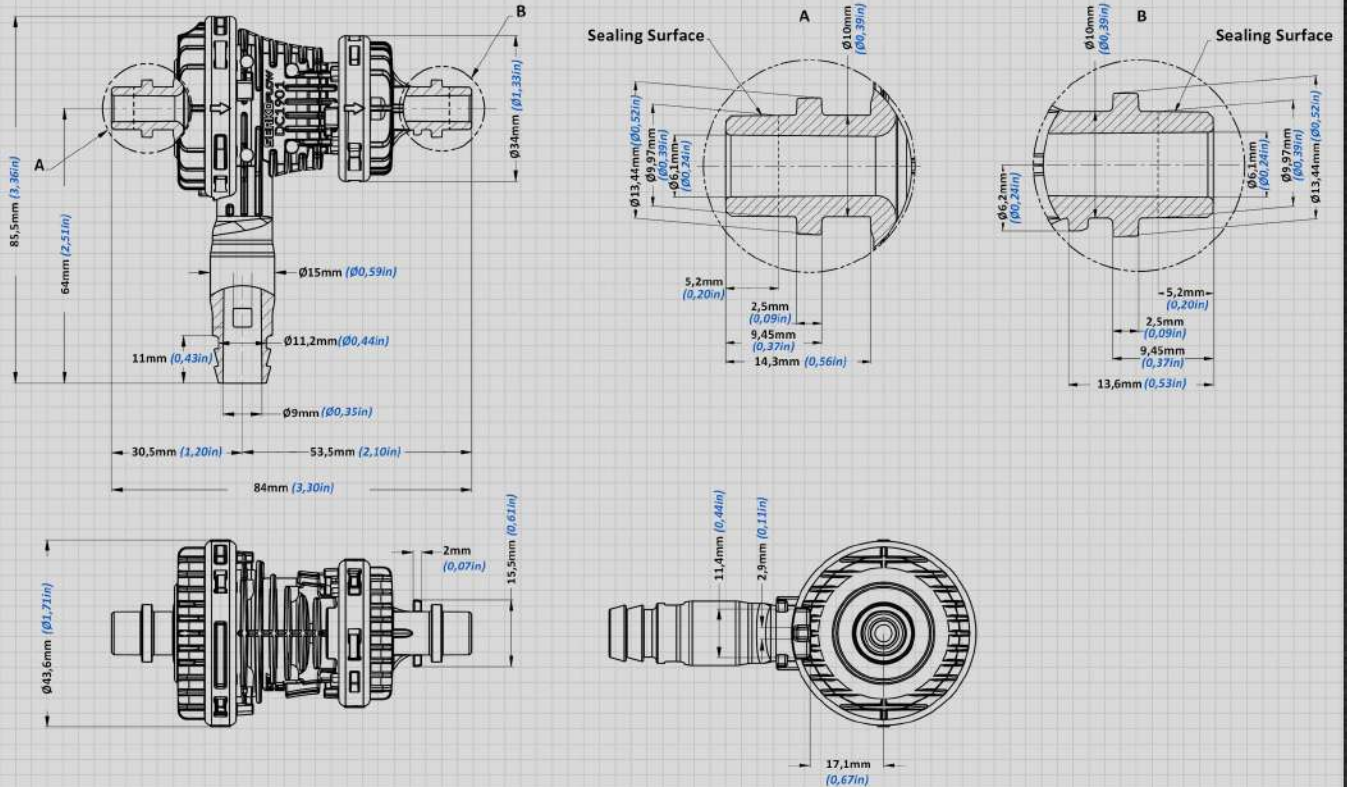

SERKOFLOW®

